

Epatec 575-L4 HZ

Features


- Intel®Skylake-U I5 6360U dual core 4-thread processor
- 2*DDR4 SODIMM RAM slot, support 2133MHz memory, up to 32GB
- 1*HDMI, 1*VGA dual independent display output
- 6* WGI211AT Gigabit Ethernet, support Wake On LAN、PXE
- 1* CISCO COM port (support RS485),1* DB9 COM port
- 1*12PIN Phoenix connector, 4-in 4-out GPIO, switch
- 6*USB, 1* SIM
- 1* DC12V power port
- Fanless cooling structure, full aluminum case

Specification

Model No.	575-L4 HZ (6360U)	
Case	Material/Structure	Full aluminum case, fanless cooling
	Color	Bright black
	Dimension	174mm*148mm*57mm
	Net Weight	1.35KG
	Installation	Desktop/Embedded
Motherboard	CPU	Intel®Skylake-U I5 6360U/2.0GHz dual core 4-thread processor, TDP 15W
	Chipset	Intel®Skylake-U SOC
	Graphics	Intel® Iris™ Graphics 540, DirectX 12 OpenGL 4.4, support 4K
	Memory	2*DDR4 SODIMM RAM slot, support 2133MHz, up to 32GB
Front Panel I/O	POWER	1* Power switch, 1* Reset switch
	AC LOSS	1*AC LOSS (Auto power on switch)
	USB	2* USB2.0
	SIM	1* SIM slot
	Phoenix Connector	1*12pin, support 4-in 4-out GPIO, switch, 5V
Rear Panel I/O	Display Port	1*VGA, 1*HDMI
	LAN	6*Intel® WGI211AT Gigabit Ethernet, support Wake On LAN、PXE
	USB	4* USB3.0
	COM	1* CISCO RS23/RS485 COM port (defaulted RS232), 1* DB9 RS232 COM port
	Audio	1* Line out, 1* MIC
	Power	1* DC 12V power adaptor port
Storage	SATA	1*2.5" SATA HDD expansion
	mSATA	1* MSATA SSD expansion, transmission rate up to 6Gbps
Expansion	Mini PCIE	1* Mini PCIE slot, support WIFI/4G module
	M.2	N/A
Support OS	Microsoft Windows	Windows7/ 10 , 64bit (not include windows code)
	Linux	Ubuntu
	Watch Dog	Support hardware reset function (L256, 0~255 seconds)
Power Supply	Power Type	External power adaptor
	Voltage Input	DC 12V
	Power Output	AC TO DC、36W / 60W
Environment	Working Temp.	-10°C ~ 60°C
	Storage Temp.	-20°C ~ 70°C
	Relative Humidity	5%-95% relative humidity, non-condensing
	Working Vibration	0.5g rms/5-500HZ/random/operating

E patec 575-L4 HZ (6360U)

Dimension Drawing

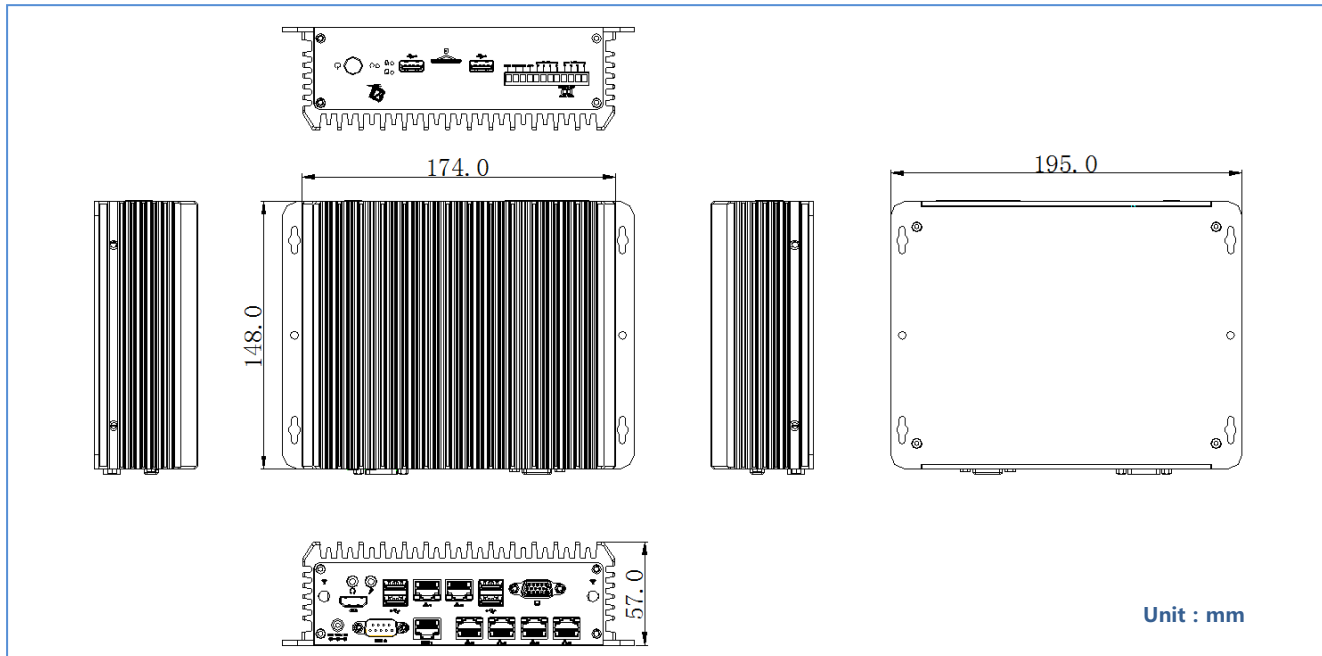

Front Panel I/O



Rear Panel I/O



Order Information

No.	Model	Processor	Motherboard	Memory	HDD	Phoenix	LAN	COM	HDMI	VGA	USB2.0	USB3.0	SIM	PS2	power-input
1	575-L4 HZ (4120U)	4120U/2.0GHz	C43_I326D	N/A	N/A	1*12PIN	6	2	1	1	4	2	1	N/A	DC 12V
2	575-L4 HZ (5250U)	5250U/1.6GHz	C43_I526D	N/A	N/A	1*12PIN	6	2	1	1	4	2	1	N/A	DC 12V
3	575-L4 HZ (3865U)	3865U/1.8GHz	C57_C326D	N/A	N/A	1*12PIN	6	2	1	1	2	4	1	N/A	DC 12V
4	575-L4 HZ (6360U)	6360U/2.0GHz	C57_I526D	N/A	N/A	1*12PIN	6	2	1	1	2	4	1	N/A	DC 12V
5	575-L4 HZ (6650U)	6650U/2.2GHz	C57_I726D	N/A	N/A	1*12PIN	6	2	1	1	2	4	1	N/A	DC 12V
6	575-L4 HZ (7200U)	7200U/2.5GHz	C57_I526D	N/A	N/A	1*12PIN	6	2	1	1	2	4	1	N/A	DC 12V
7	575-L4 HZ (7600U)	7600U/2.8GHz	C57_I726D	N/A	N/A	1*12PIN	6	2	1	1	2	4	1	N/A	DC 12V
8	575-L4 HZ (8145U)	8145U/2.1GHz	C81-I326D	N/A	N/A	1*12PIN	6	2	1	1	2	4	1	N/A	DC 12V
9	575-L4 HZ (8265U)	8265U/1.6GHz	C81-I526D	N/A	N/A	1*12PIN	6	2	1	1	2	4	1	N/A	DC 12V
10	575-L4 HZ (8565U)	8565U/1.8GHz	C81-I726D	N/A	N/A	1*12PIN	6	2	1	1	2	4	1	N/A	DC 12V