




Front I/O

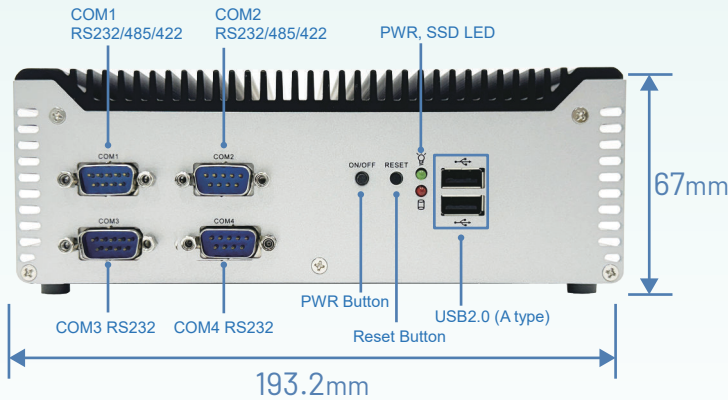

Rear I/O

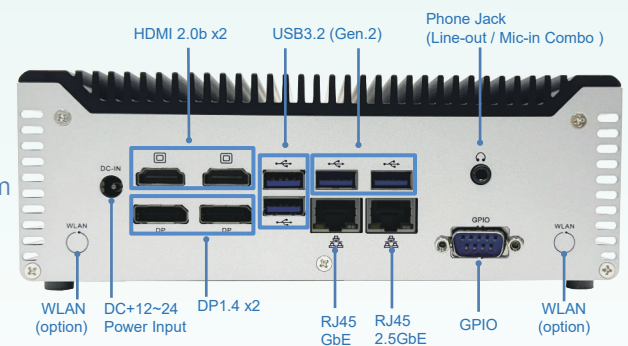

▼ Video

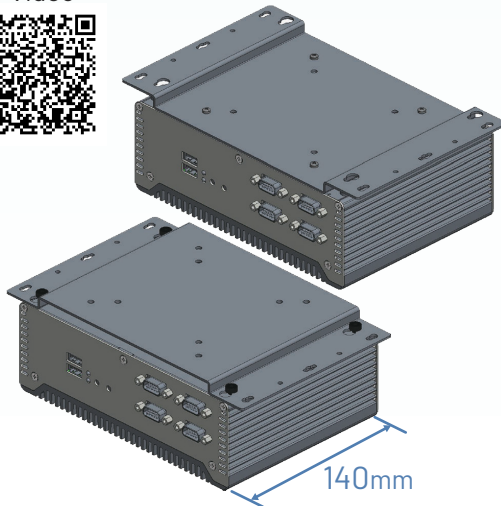

▲ Wall-mount and VESA-mount supported

Features

- ▶ Intel® Tiger Lake i5-1135G7 Processor
- ▶ DDR4 3200MHz Dual Channel SO-DIMM x2, memory up to 64GB
- ▶ HDMI 2.0 x2 (Max. 4096x2160@60Hz)
- ▶ DP 1.4 x2 (Max. 4906x2160@60Hz)
- ▶ Support Four Displays (4K HDR Displays or One 8K SDR Displays (DP))
- ▶ M.2 M-key x1 (2242/2280), PCIe Gen.4 support NVMe SSD
- ▶ M.2 E-key x1 (2230), USB2.0/PCIe interface (CNVi supported) WLAN/BT
- ▶ COM1/COM2 RS232/485/422
- ▶ COM3/COM4 RS232
- ▶ DC Jack power input +12V~24V power adapter
- ▶ Operating Temperature -20°C to +60°C

Processor	Intel® Tiger Lake i5-1135G7 Processor (Quad core 2.4GHz)
System RAM	DDR4 3200MHz Dual Channel SO-DIMM x2, memory up to 64GB
BIOS	AMI BIOS
Storage	M.2 M-key x1 (2242/2280), PCIe Gen.4 support NVMe SSD
Expansion	M.2 E-key x1 (2230), USB2.0/PCIe interface (CNVi supported) WLAN/BT
Display	Intel® HD Graphics, shared memory HDMI 2.0b x2 (Max. 4096x2160@60Hz) DP 1.4 x2 (Max. 4096x2304@60Hz) Support Four Displays (4K HDR Displays or One 8K SDR Displays (DP))
Ethernet	Intel® i219-LM 1.0GbE x1 Intel® i225-V 2.5GbE x1
Audio	HD Audio Realtek ALC888S-VD2
Front I/O	Power button x1/Reset button x1 Power LED x1/ SSD LED x1 USB 2.0 x2 COM x4 (RS232/485/422 x2, RS232 x2)
Rear I/O	USB 3.2 (Gen2) x4/ RJ45 x2 HDMI x2/ DP x2 Mic-in & Line -out Combo x1 GPIO x1
OS support	Windows 10, Windows 11 (64-bit), Linux
Mechanical & Environment	
Power Requirement	DC +12~24V Power adapter only (2.5ø)
Power adapter	+12V7.5A (90W)
Operating Temperature	-20~+60°C
Storage Temperature	-30~+70°C
Net Weight	2.2 kgs
Dimensions (W x D x H)	193.2 x 140 x 67mm
Certificates	CE, UKCA, FCC, VCCI